

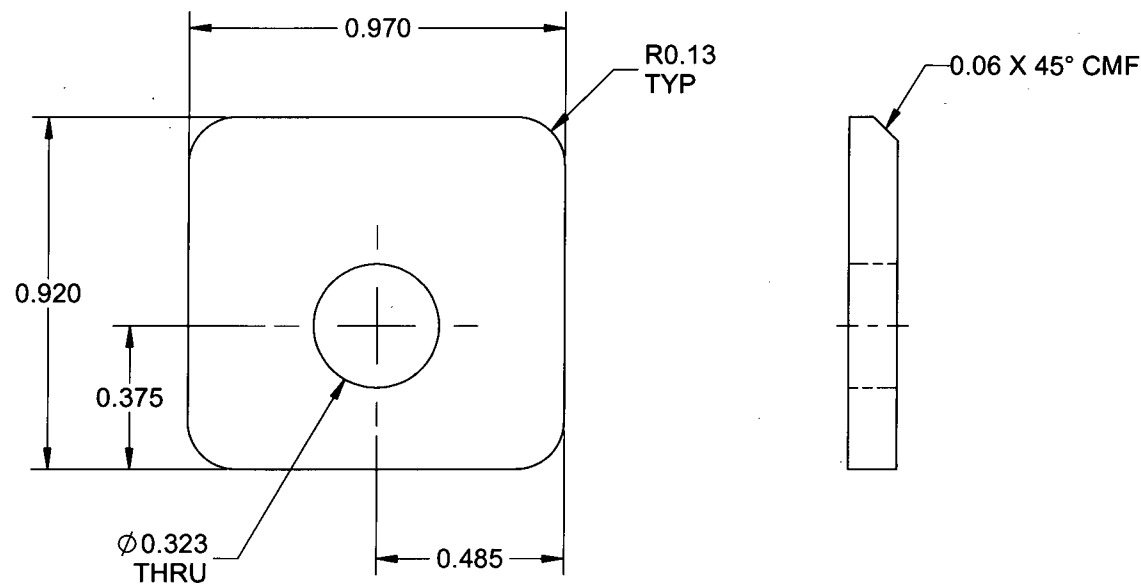
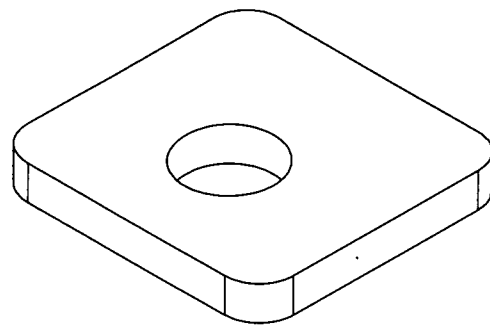


8 7 6 5 4 3 2 1

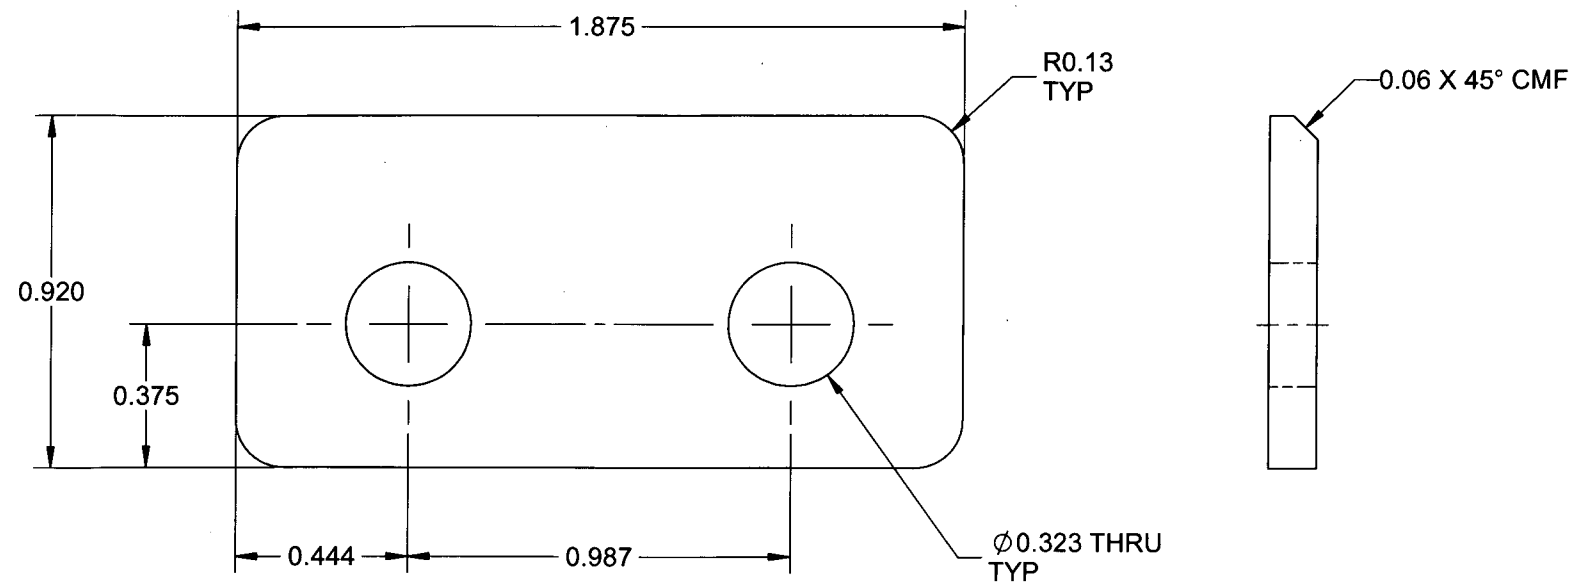

D5084-1 RADIUS BLOCK

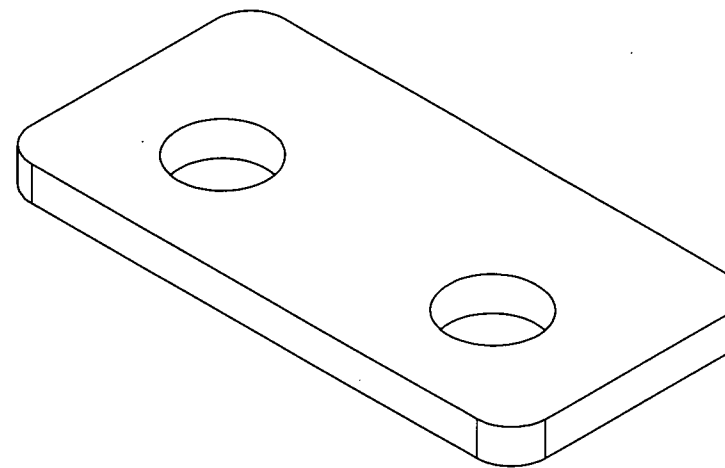

D5084-3 RADIUS BLOCK

RELEASED
2014-04-15

NOTES:

- 1) MATERIAL: AISI 304/316 STAINLESS STEEL SHEET ANNEALED 2B FINISH, 11 GAUGE (0.125 THICK)
PER AMS 5513 (304) OR 5524 (316) OR ASTM A240 OR ASME SA240
REF. DART SPEC. M304S11GA
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D5084-X" AND B/N PER PER QSI 044 METHOD 6.7
- 7) WEIGHT -1: 0.01 lbs
-3: 0.02 lbs

APPROVED

A	NEW ISSUE	AJS	14.04.08
REV.	DESCRIPTION	BY	DATE
DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED	AP	DRAWING NO.	REV. A
MFG. APPR.	JLM	D5084	SHEET 1 OF 1
APPROVED	MP	TITLE	SCALE
DE APPR.	DS	RADIUS BLOCK	NTS
DATE	14.04.08	COPYRIGHT © 2014 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	